

Visqueen V20 Floor Membrane BS8102 Type C Cavity Drain System

Page 1 of 5



- A high quality robust HDPE studded membrane
- Suitable for new, existing and retrofit build projects
- Quick and easy to install flooring membrane
- BBA Approved
- BS8102 Type C cavity drain protection

Description

Visqueen V20 Floor Membrane is a 1mm thick high density polyethylene (HDPE) profiled sheet with 20mm high studs. The membrane is an integral part of Visqueen's Cavity Drain System which effectively acts as a below ground water management system. The membrane is supplied in rolls of 2m x 20m and is black in colour.

Application

The membrane is used as a floor membrane as part of the Visqueen Cavity Drain System. The membrane can be used in vertical (wall) applications where a higher drainage capacity is required or complex convoluted wall shapes. The system is typically used for internally tanking basements within new, existing and retrofit build projects. The system can also be used for heritage buildings and in conservations projects.



EN 13967

15

In accordance with Type C structures (as classified in BS8102:2009), when applied and installed correctly, the Visqueen Cavity Drain System is capable of providing the levels of protection required for Grades 1, 2 & 3 basements. Examples of use of structure for Grade 1 include car parks; Grade 2 - plant rooms; and Grade 3 are living areas such as residential and offices. The product can also be used in conjunction with Type A or B protection where additional combined protection is required.

BS8102:2009

The Basement Information Centre has produced an excellent general guidance document for BS8102:2009 Basement Waterproofing. The publication examines the factors to consider when deciding the form of basement waterproofing, designs and the characteristics of the main types of waterproofing solutions. For more information on BS8102:2009 [please click here.](#)

VISQUEEN
 BUILDING PRODUCTS

Heanor Gate, Heanor, Derbyshire DE75 7RG

T: 0845 302 4758 F: 0845 017 8663

enquiries@visqueenbuilding.co.uk

www.visqueenbuilding.co.uk

VISQUEEN BUILDING PRODUCTS IS A TRADING NAME
 OF BRITISH POLYTHENE LIMITED, COMPANY NUMBER:
 350729, REGISTERED OFFICE: ONE LONDON WALL,
 LONDON, EC2Y 5AB

STRUCTURAL WATERPROOFING
 AND GAS PROTECTION SYSTEMS

Visqueen V20 Floor Membrane BS8102 Type C Cavity Drain System

Page 2 of 5

All construction should conform with the Building Regulations, Codes of Practice and British Standards in current use at the time the building is being constructed. In particular it is recommended that reference is made to BS 8102:2009 and Visqueen's BBA certificate.

Preparation

All surfaces: Should be firm, and free from obstructions, which would hamper free drainage. Defects that might result in unacceptable leaks should be remedied before the system is installed.

Concrete surfaces: Should be pre-treated with Visqueen Anti-Lime Coating to reduce the risk of leaching of free lime or mineral salts and to avoid the obstruction of the drainage system.

Vertical Wall Application

Installation of the membrane is commenced at the top of the construction with "studs down" against the wall. For horizontal joints, the lower membrane is always positioned in front of the upper membrane. Membrane from rolls should be overlapped by 2 studs and sealed using Visqueen Sealing Rope placed between the two rows of studs. Fixings are made through the membrane into 10 mm holes drilled through the studs. Visqueen Masonry Plugs, to which Visqueen Sealing Rope has been applied around the rim, are inserted into the holes and tapped flush with the membrane. The Visqueen Sealing Rope forms a sealing gasket between the plug and membrane.

Horizontal Floor Applications

Begin at one side of the room and unroll the Visqueen V20 Floor Membrane against the wall membrane with the studs facing down onto the floor and cut the membrane to the desired length or width of the floor, just like laying a carpet. Repeat this exercise till all the lengths/widths required to cover the floor area have been cut allowing for a two-stud membrane overlap.

Overlaps

The individual sheets of membrane that have now been cut, are joined together with Visqueen Sealing Rope. The sealing rope is positioned between the two stud formations along the edge of the membrane to be overlapped and remove the release paper. Lift the next sheet of V20 membrane over the two interlocking studs and press the overlapping membrane down onto the sealing rope.

Foot pressure can be applied by sliding the sole of the foot over the membrane joint, to ensure that the membranes are fully bonded.

Wall/floor junctions

The next stage of the operation is to link the V20 floor membrane to the V8 wall membrane, which can be achieved, using Visqueen Corner Strip. The vertical and horizontal membranes should be butt jointed at the base of the wall. Visqueen Corner Strip is folded in half along the length of the piece to be used to create the 90° angle. Once correctly aligned, carefully pull off the backing paper and press firmly out with the palm of the hand onto the floor and wall membranes.

Water management

A drainage system of suitable capacity should be provided to collect and dispose of the infiltrating water. The system must be maintainable and inspected at regular intervals. Please contact Visqueen Technical Support team for further information on 0333 202 6800 or email enquiries@visqueenbuilding.co.uk. Please also [click here to see Visqueen's full range of accessories.](#)

Storage

Rolls of the product should be stored upright when stored over long periods, in a warm dry environment and preferably under cover.



SPECIFICATION SUPPORT

The following items are available to view online or to download from www.visqueenbuilding.co.uk

- Technical Datasheets
- Typical installation CAD details
- Health and Safety data

Register online for access to NBS Clauses and for information about our CPD Seminars



TECHNICAL SUPPORT

For advice on detailing or installation call Visqueen Building Products Technical Help Line 0845 302 4758. Pricing & Availability may be obtained from our UK Network of merchant stockists. For details of these call our Sales Office on 0845 302 4758.


Visqueen V20 Floor Membrane BS8102 Type C Cavity Drain System

Page 3 of 5

Membrane system components – see separate datasheet for detailed information or [click here](#)

Visqueen produce a range of ancillary products for use with V20 Floor membrane which include:

- Visqueen CD Sealing Rope (10mm x 5m) supplied 2 rolls per box
- Bonds V20 Floor membranes together to ensure watertight joint
- Visqueen CD Double Sided Sealing Tape (25mm x 20m)
- Bonds V8 Wall membranes together to ensure watertight joint
- Visqueen CD Corner Strip (150mm x 10m) supplied 2 rolls per box
- A single sided tape to join the Wall/Floor junction (900 angles)
- Visqueen Masonry Plugs (10mm x 75mm) supplied 100 per box.
- A fixing plug for vertical fixing of the cavity drain
- Anti-Lime Coating supplied in 25L tubs - see separate datasheet or [click here](#)
- Water Channel – see separate datasheet or [click here](#)
- Sumps & Pumps - see separate datasheet or [click here](#)

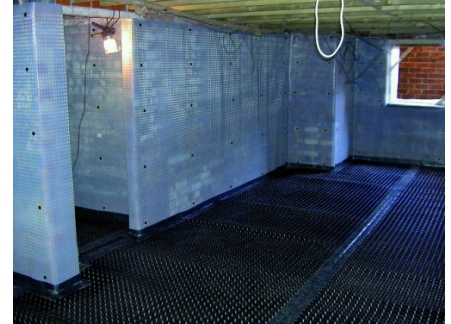

SPECIFICATION SUPPORT

The following items are available to view online or to download from www.visqueenbuilding.co.uk

- Technical Datasheets
- Typical installation CAD details
- Health and Safety data

Register online for access to NBS Clauses and for information about our CPD Seminars



TECHNICAL SUPPORT

For advice on detailing or installation call Visqueen Building Products Technical Help Line 0845 302 4758. Pricing & Availability may be obtained from our UK Network of merchant stockists. For details of these call our Sales Office on 0845 302 4758.

Visqueen V20 Floor Membrane BS8102 Type C Cavity Drain System

Page 4 of 5

Technical Data and CE Mark

Visqueen V20 Floor Membrane complies with the requirements and clauses of EN 13967.



EN 13967

15

Product Data				
Characteristic	Test method	Units	Compliance criteria	Value or statement
Dimensions		m		2 x 20
Stud height		mm		20
Mass	EN 1849-2	kg/m ²	-10%/10%	0.95
Air gap volume		l/m ²		14
Drainage capacity (approx.)		l/m ²		13
Max compressive strength		kN/m ²		200
Resistance to deformation under load (max) @ 50kN/m ²		%		20
Thermal resistance		m ² .C/W		0.17
Watertightness	EN 1928	-	Pass/Fail	Pass 60Kpa
Durability after artificial ageing	EN 1847	-	Pass/Fail	Pass
Durability against chemicals	EN 1847	-	Pass/Fail	Pass
Resistance to tearing (min.)	EN 12310-1	N	>	350
Resistance to tearing (nail shank) CD	EN 12310-1	N	>	
Water vapour transmission properties	EN 1931	Sd	-25%/25%	550
Resistance to static loading	EN 12730	Kg	>MLV	Pass @ 20kg
Resistance to Impact method A	EN 12691	m	MDV	0.85
Reaction to fire	EN 13501-1		Class	F
Joint Resistance	EN 12317-1	N	>	35
Tensile properties - MD	EN 12311-2	N/50 mm	>	530
Tensile properties - CD	EN 12311-2	N/50	>	500

Visqueen V20 Floor Membrane BS8102 Type C Cavity Drain System

	mm	
Bitumen compatability (Degredation max)	%	15

The information given in this datasheet is based on data and knowledge correct at the time of printing. Statements made are of a general nature and are not intended to apply to any use or application outside any referred to in the datasheet. As conditions of usage and installation are beyond our control we do not warrant performance obtained but strongly recommend that our installation guidelines and the relevant British Standard Codes of Practice are adhered to. Please contact us if you are in any doubt as to the suitability of application.